


2 No. SPECIFIED TREE TIES SECURELY FIXED TO STAKES AT 1300-1500mm ABOVE GROUND.

150mm x 50mm TREATED PINE EDGE STRIP TO FINISH FLUSH WITH ASPHALT. SECURELY FIX TO 50 x 50 x 500 H.W. PEGS TO ALL CORNERS & EDGES AT 600mm MAXIMUM CENTRES USING 2 No. GALV. HIDDEN TECH SCREWS. STAKES TO FINISH 50mm BELOW TOP OF TIMBER EDGE.

EXISTING SOIL & SUBSOIL TO BE EXCAVATED & CULTIVATED TO A MINIMUM OF TWICE THE WIDTH OF THE ROOTBALL AND EQUAL IN DEPTH. CONTAMINATED MATERIAL, ROAD BASE & PARTICLES GREATER THAN 75mm DIAMETER TO BE REMOVED.

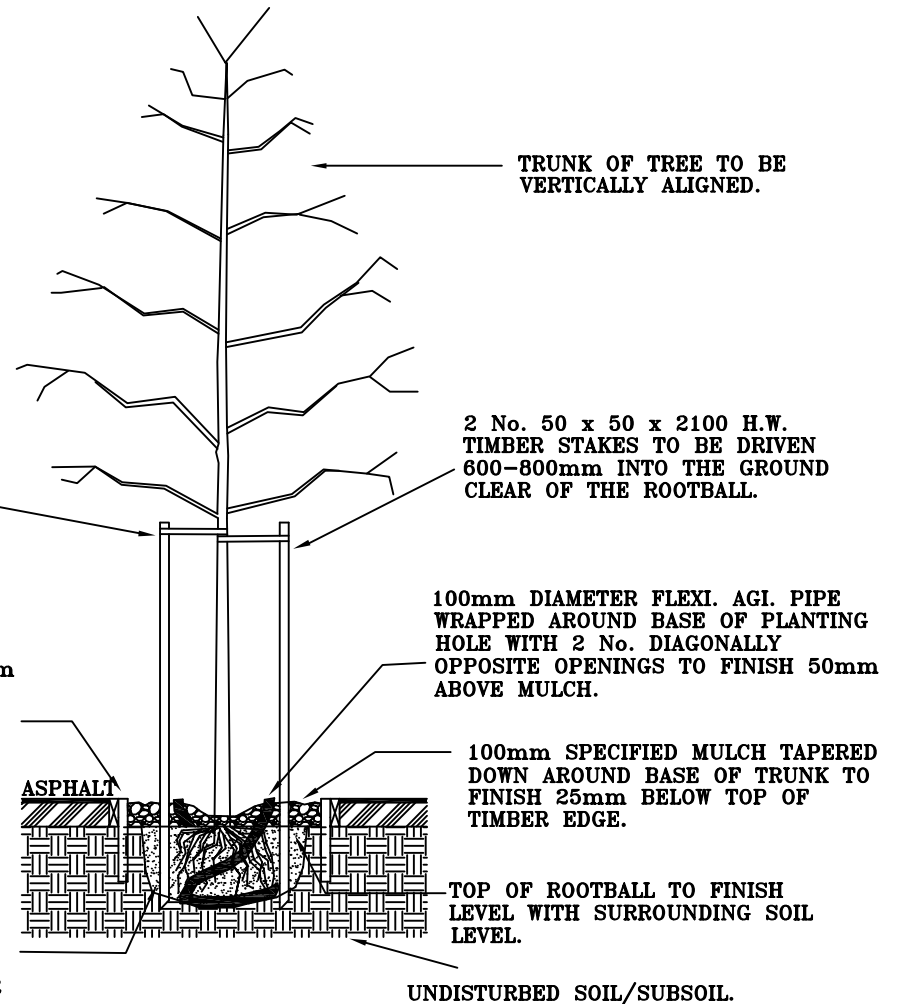

NOTES:

- DRAWING TO BE READ IN CONJUNCTION WITH LANDSCAPE STANDARDS DOCUMENT, PLANT SCHEDULE & LANDSCAPE PLANS WHERE PROVIDED.
- TYPE A TYPICALLY APPLIES TO TREES IN ASPHALT FOOTPATHS, INTERSECTION NIBS & NARROWINGS.

CITY OF BALLARAT

No.	AMENDMENTS	DATE

Approved by:

Date:

LANDSCAPE STANDARDS ADVANCED TREE PLANTING DETAIL - TYPE A



SCALE:
NOT TO SCALE

SHEET 1 OF 1

DRAWING NO:
SD-L2